


COFFRET GESTION POMPE ADUCTION ET PUISAGE Affichage digital



Guide rapide


internal configuration

configuración interna
descriptif intérieur

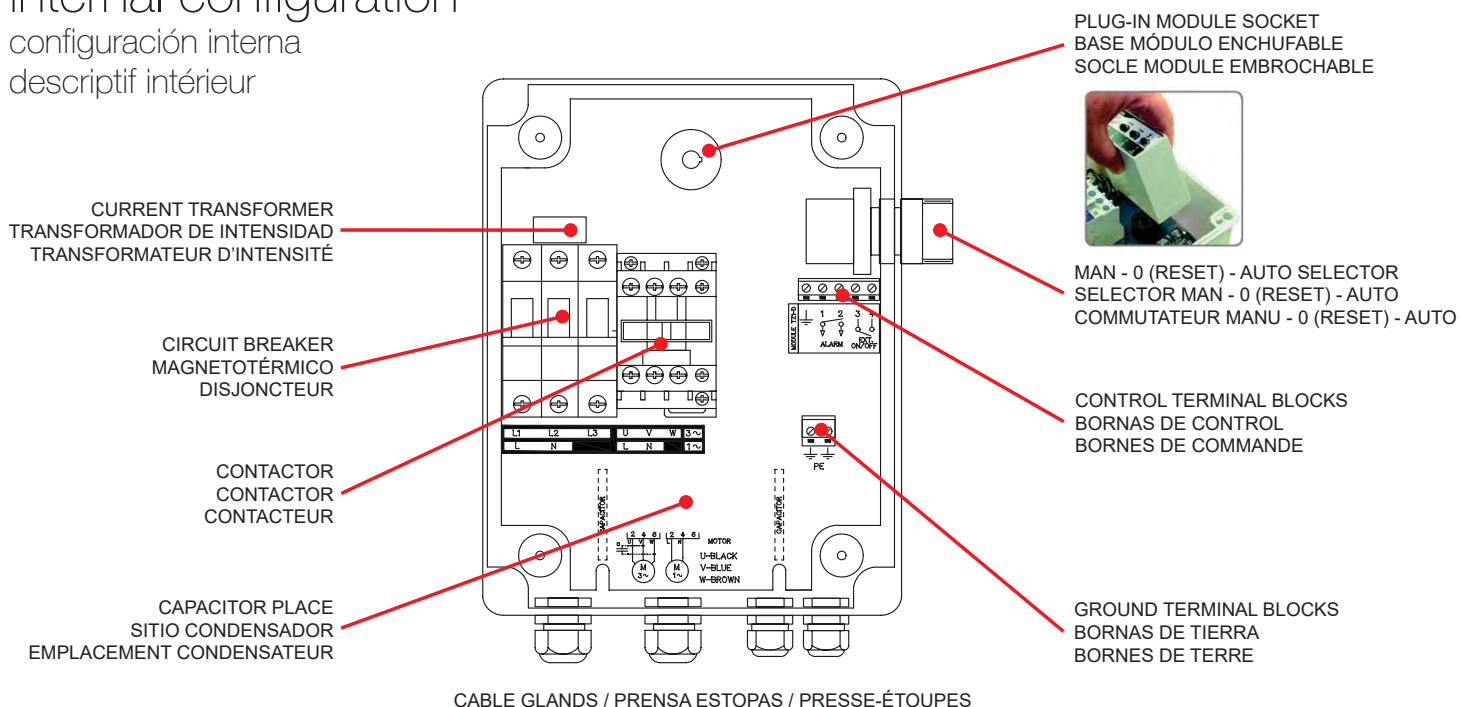


power connections

conexiones de potencia
raccordements de puissance

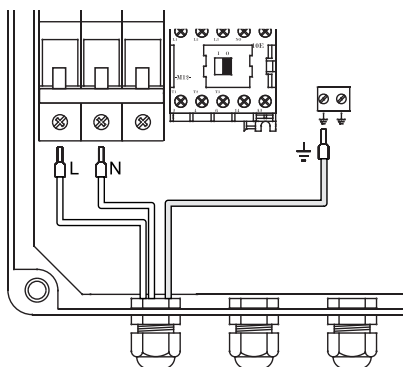


M
1~

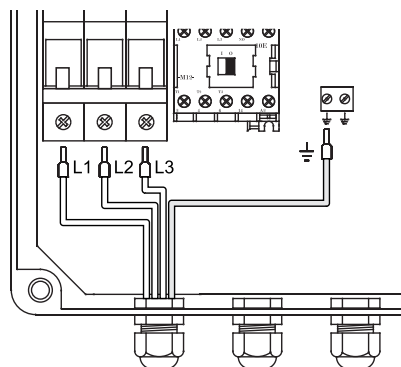


M
3~

control module módulo de control module de contrôle

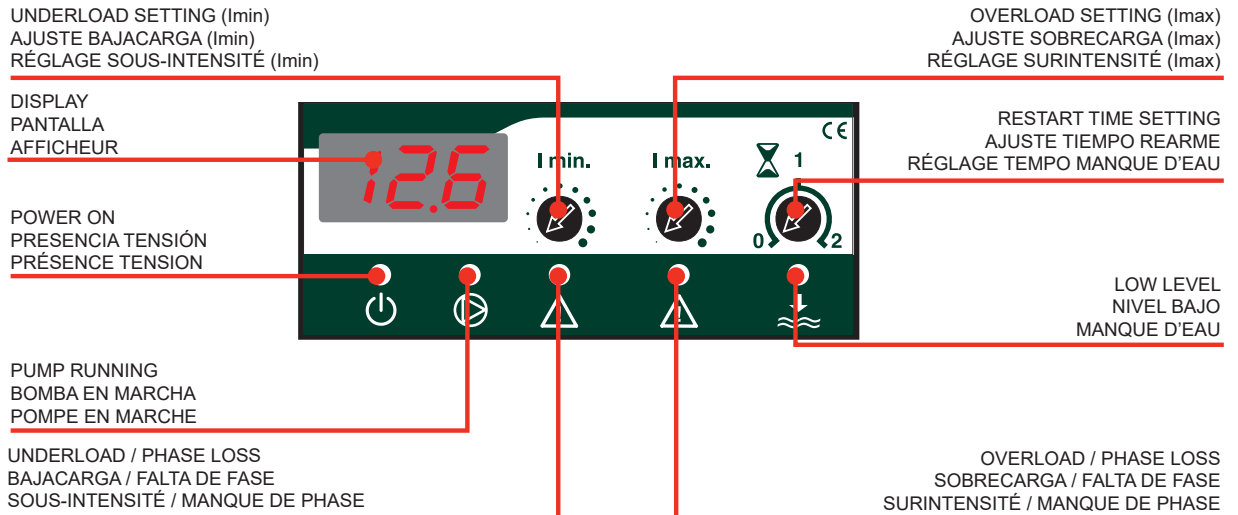

control connections


conexiones de control
raccordements de commande

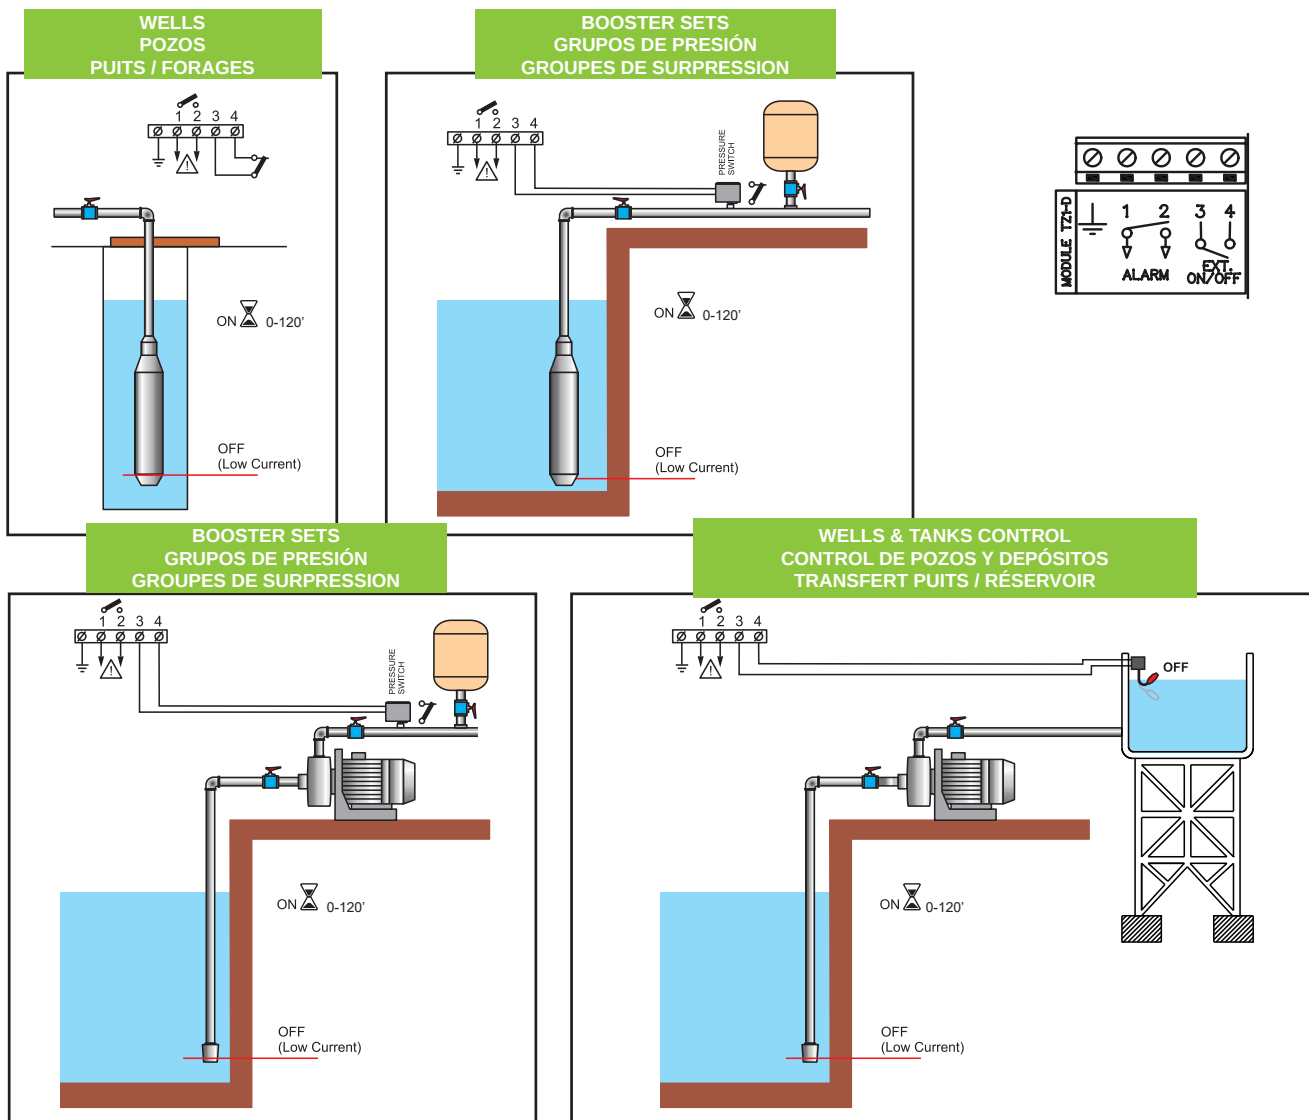


(*) Set to "0" recommended / Se recomienda ajustar a "0" / Réglage à "0" recommandé

current settings ajustes de intensidad réglages d'intensité


overload setting (I_{max}) ajuste de sobrecarga (I_{max}) réglage de surintensité (I_{max})

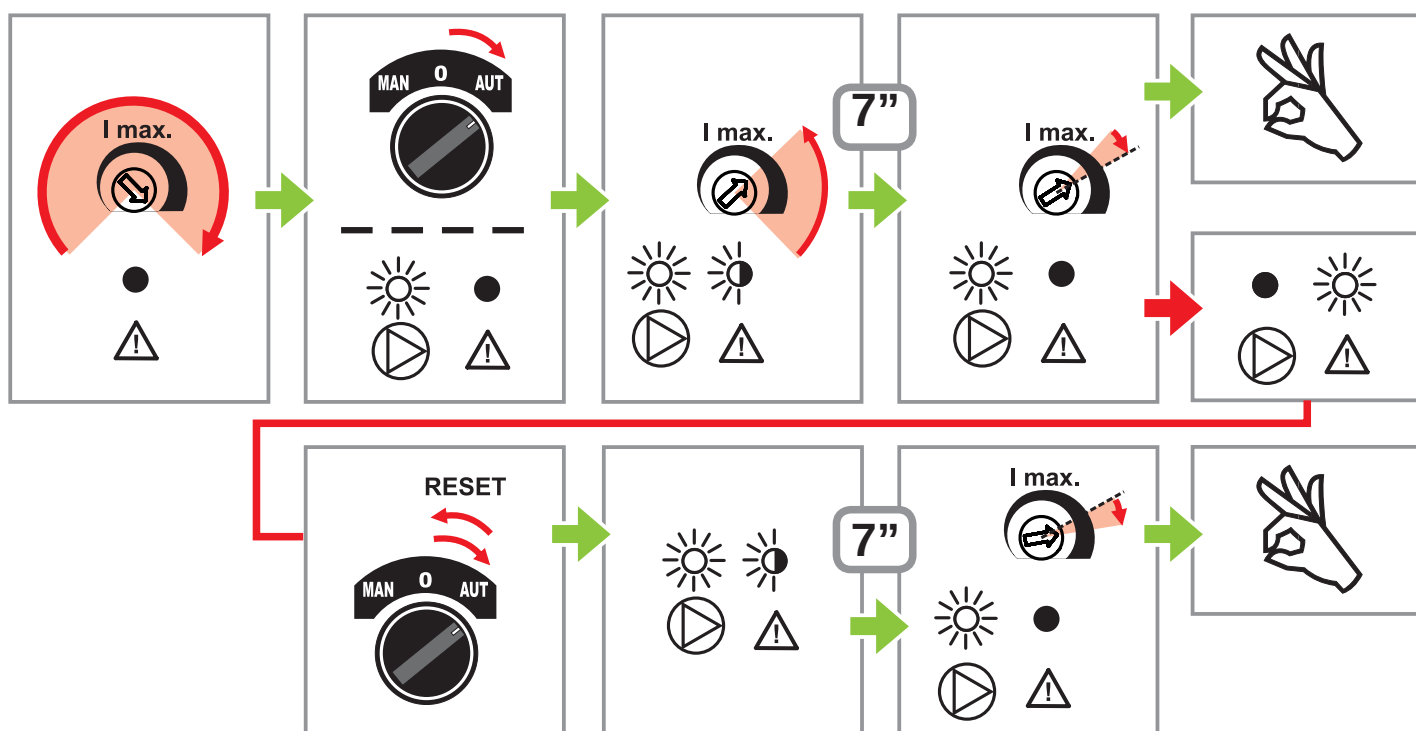

underload setting (I_{min}) ajuste de bajacarga (I_{min}) réglage de sous-intensité (I_{min})

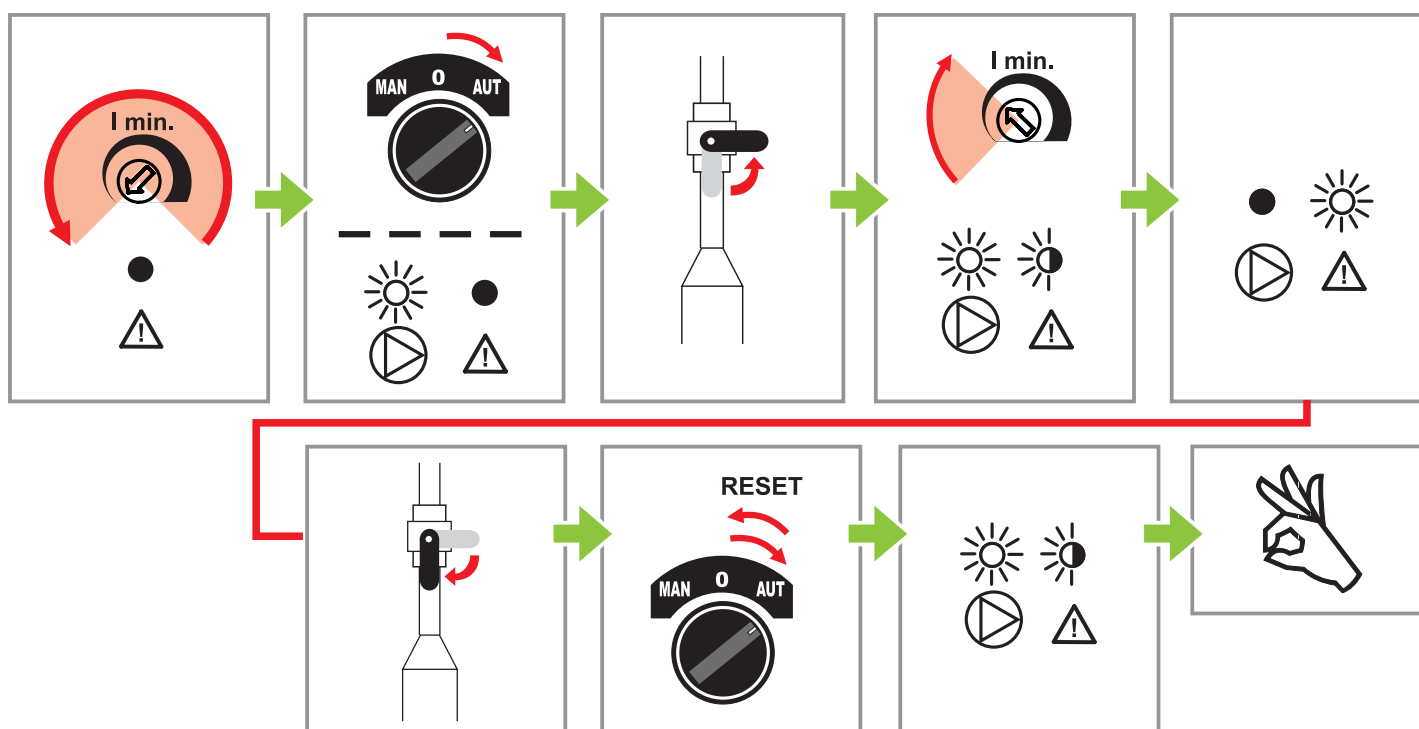

pump failure detection detección de fallo de bomba détection de défaut de pompe

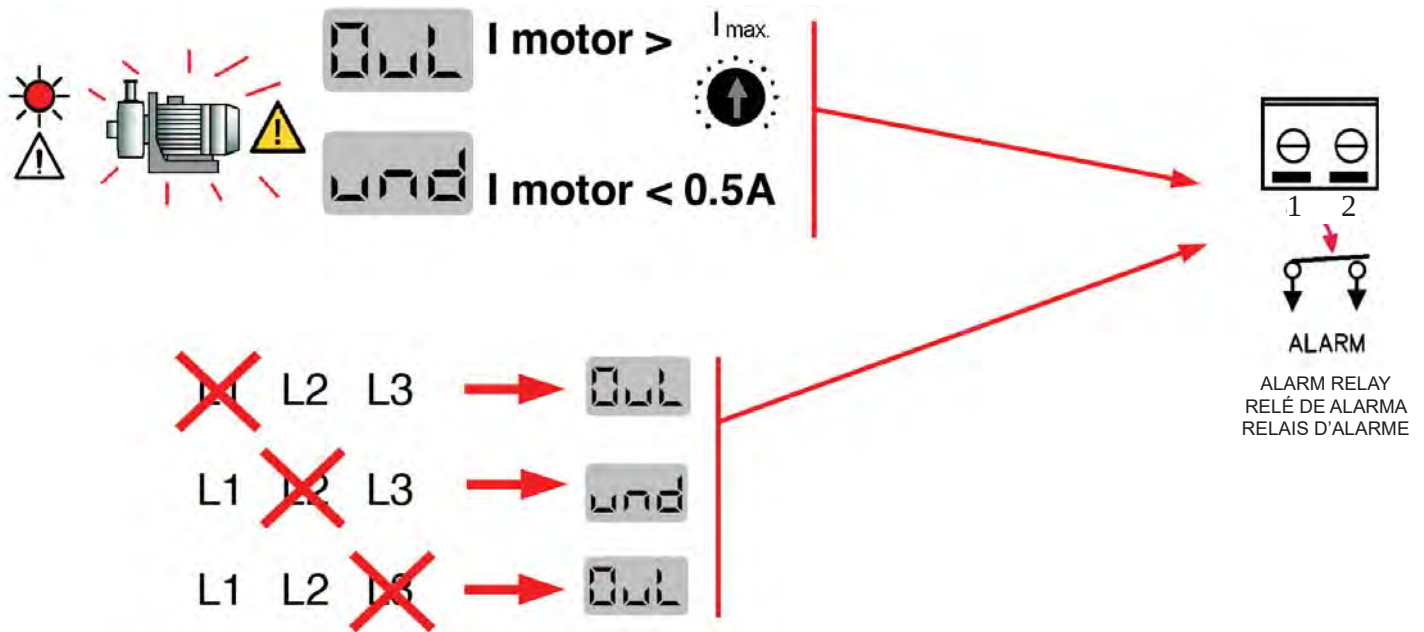

technical specifications

especificaciones técnicas

spécifications techniques

Supply voltage	230V~ I/III or 400V~ III (according to the model) -20% +30% - 50/60Hz
Pump maximum current	18A - AC3
Overload/underload setting	1,5...19,2A (alarm trip in 7 seconds)
Re-start time	0...2 hours
Remote for EXTERNAL ON/OFF connection	Contact or voltage 6 to 250V~/V=
Terminal blocks wiring size	10mm ² (power) 4mm ² (control)
Cable glands configuration	1xM20 (main supply) / 1xM20 (motor) / 2xM16 (control)
Protections	Overload, underload, phase failure, over-voltage, pump wiring failure and wrong control wiring
Alarm contact	5A - 250V~ / 5A - 30V=
Alarm contact activation	Overload, underload and phase failure
Recording information (PUMPCHECK)	Module identification number, counter resets, pump running hours, pump starts, pump alarms and last alarm tripping current
Size/Weight/IP/Temperature	240 (height) x 190 (width) x 110 (depth) / 1820g / IP66 / -10 +55°C